

DHI-ASI7213X-V1-T1

Face Recognition Access Controller



- 2.5D curved screen
- 7-inch LCD display with resolution of 1024 × 600
- 2MP CMOS, WDR
- Auto illumination reduces light pollution
- Can hold 100,000 users, 100,000 face images, 100,000 cards, 100,000 password, 50 administrators, and 300,000 records
- Support face, IC card, password unlock and unlock through their combinations
- With face detection box; the largest face among faces that appear at the same time is recognized first; the maximum face size can be configured on the web
- Face-camera distance: 0.3 m–2.0 m; human height: 0.9 m–2.4 m (lens-ground distance: 1.4 m)
- With face recognition algorithm, the terminal can recognize more than 360 positions on human face
- Face recognition speed: 0.2 s per face
- Support liveness detection
- Accurate recognition in backlight and front light
- Various unlock status display modes protect user privacy
- Support mask detection, report alarm of abnormal events without wearing a mask
- Support duress alarm, tamper alarm, intrusion alarm, door contact timeout alarm, and illegal card exceeding threshold alarm
- Support general users, patrol users, VIP users, guest users, and special users
- Support Video Door Phone
- This product is not for medical use, rather monitor temperature for access controlling only

Technical Specification

System

Main Processor	Embedded Processor
Network Protocol	IPv4, RTSP, RTP, TCP, UDP, P2P, SIP
OSDP Protocol	Yes
Interoperability	ONVIF; CGI
SDK and API	Support SDK

Basic

Display Screen	7-inch display screen
Screen Type	Capacitive screen
Resolution	600 (H) × 1024 (V)
Camera	1/2.8" 2MP CMOS high definition WDR dual camera
WDR	120 dB
Light Compensation	Auto white light Auto IR light
Status Indicator	1 indicator light. Red: Error; Green: Normal; Blue: Working
Voice Prompt	Yes
Casing	Aluminium alloy/tempered glass/PC



Function

Unlock Mode	Card/Remote/Password/Face unlock and unlock through their combinations
Card Type	IC card
Period List	128
Holiday Period	128
First-Card Unlock	Yes

Remote Verification	Yes
Peripheral Card Reader	1 RS-485, 1 Wiegand
Multiple Authentication	Yes
Real-Time Surveillance	Yes
Web Configuration	Yes

Performance

Card Reading Distance	3 cm
Face Recognition Distance	Face-camera distance: 0.3 m–2.0 m Human height: 0.9 m–2.4 m
Face Verification Accuracy	99.5%
Face Recognition Time	0.2 s

Capacity

User Capacity	100,000
Face Image Capacity	100,000
Card Capacity	100,000
Password Capacity	100,000
Record Capacity	300,000 records

Port

RS-485	1
Wiegand	1 (input or output)
USB	1 USB2.0 port
Network	2 Ethernet Port
Alarm Input	2 (Switch quantity)
Alarm Output	2 (Relay)
Alarm Linkage	Yes
Exit Button	1
Door Status Detection	1
Lock Control	1

Alarm

Anti-passback	Yes
Tamper	Yes
Duress	Yes
Door Sensor Timeout	Yes
Intrusion	Yes
Illegal Card Exceeding Threshold	Yes

General


Power Adapter	Included
Power Supply	12V 2A DC
Power Consumption	≤ 24W

Product Dimensions	312.5 mm × 129.0 mm × 36.7 mm (12.30" × 5.08" × 1.44")
Packaging Dimensions	Controller packaging: 380 mm × 235 mm × 124 mm (14.96" × 9.25" × 4.88") Protective case: 494 mm × 402 mm × 275 mm (19.45" × 15.83" × 10.83")
Operating Temperature	-10°C to +55°C (+14°F to +131°F)
Operating Humidity	0%RH–90%RH (non-condensing)
Operating Environment	Indoor
Gross Weight	2.2 kg (4.85 lb)
Installation	Wall mount
Certifications	CE/FCC

Ordering Information

Type	Model	Description
Face Recognition Access Controller (indoor)	DHI-ASI7213X-T1	7-inch Face Recognition Access Controller (indoor)

Dimensions (mm[inch])

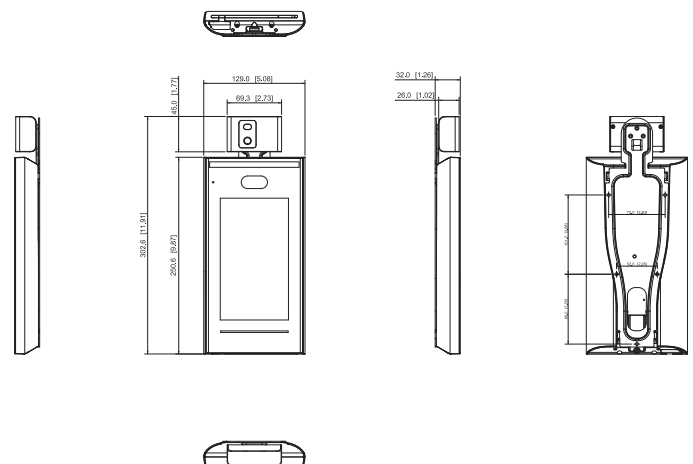

Application

Management Platform

Client

