

# UTC-S1062A

## 10 inch Industrial Panel PC



### Features

- Aluminum die-casting chassis, fanless design
- Wireless Design
- 10 inch LED TFT LCD, capacitive touch
- Intel Celeron J1900 2.0-2.42G CPU
- 3\*COM, 2\*LAN, 5\*USB2.0, 1\*USB3.0
- AT & ATX Model
- Front Panel IP65 Level
- DC 9~36V power input optional



UTC-S1062A is an intelligent, fanless panel PC, 10" Panel PC equipped with an Intel® Bay Trail processor. Meeting the demands of harsh environments, in addition, the dual GbE LAN, 3 x serial ports, 6 x USB ports, make device connection and integration easy.


### Specifications

Processor	CPU	Intel Baytrail-D Celeron J1900, 2.0~2.42GHz, 4cores, 4threads, 2M cache, 22nm,TDP 10W	
	Cooling System	Fanless	
	Memory	Single Socket, 4GB-8GB DDR3L	
	Storage	mSATA SSD Full Size+SATS 2.5"SSD	
	I/O ports		5xUSB2.0+1xUSB3.0, Type-A
			COM: 3xRS232, DB9, 2*RS485/RS422 optional
			Dual Display: 1xHDMI (1920*1200 @30Hz) 1xVGA (1920*1200 @30Hz)
Network(LAN)		Audio: 1xMic-in, 1x Line-out	
		Wi-Fi: 802.11 a/g/n, 2x2 Antenna, 2.4/5 GHz, 300 Mbps Max Speed	
Input Voltage	Input Voltage	12V DC(3 Pin Phoenix Connector), optional 9V-36V DC	
	Control SW/LED	Power Button, AT & ATX Model	
LCD Display	Display Type:	10 inch TFT LED Panel( LED Backlight)	
	Max. Resolution:	1024x768 / 4:3	

	Luminance(cd/m <sup>2</sup> )	300nits
<b>Touchscreen</b>	Touch Type	Capacitive Touch
<b>OS Support</b>	OS Support	Microsoft Windows 7/ Windows 10/Windows 11/ Linux
<b>Environment</b>	Operating Temperature	0°C ~ 50°C(14~ 140 °F)(extend temperature optional)
	Storage Temperature	-10°C ~ 60°C(-4 ~ 158 °F)
	Front Panel Protection	IP65 compliant
<b>Mechanical</b>	Dimensions	(W*H*D): 252.8x200x64.8mm cutout size: 241.5*186mm
	Weight	2.6 KG (N.W.)
	Color	Black
	Material	Aluminum
	Certification	CE / RoHS
<b>Custom Service</b>	Custom Service	Custom BIOS, System Encryption, Custom LOGO

## Dimensions

Unit: mm

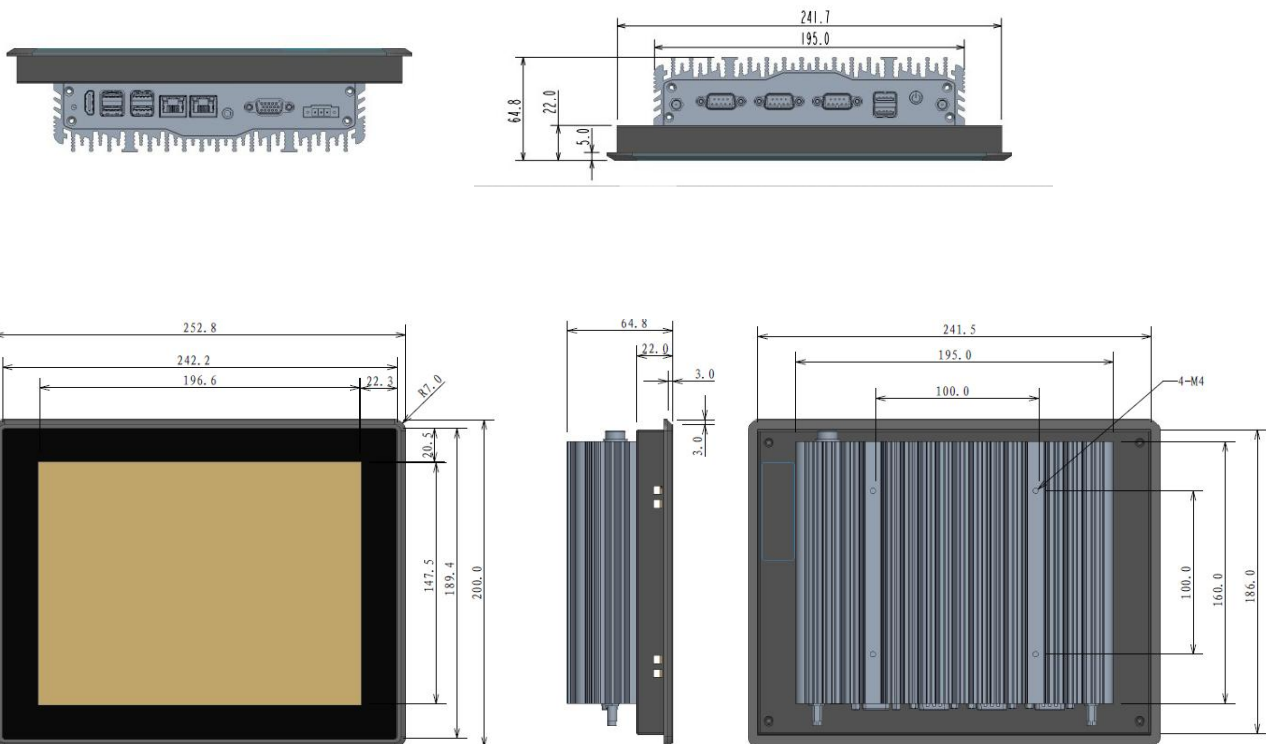





- Cable-less design and Board to Board design
- Highly compatible
- Modular design
- Easy operation: easy assembly and easy Maintenance
- Supports customization

Packing List	Ordering Information
1x UTC-S1062A	UTC-S1062A-1: Projected Capacitive Touch Version
1x Power Adapter	<b>Operating Systems</b>
VESA Bracket & Buckles	WIN7 32bit 64bit EN/CN
<b>Optional accessories</b>	WIN10 32bit 64bit EN/CN
Power Cable 3-pin 200cm	WIN11 32bit 64bit EN/CN
	Linux Ubuntu 12.04/16.04/18.04