


UTC-W2162A

21.5 inch Industrial Panel PC



Features

- Aluminum die-casting chassis, fanless design
- Wireless Design
- 21.5 inch LED TFT LCD, capacitive touch
- Intel Baytrail Celeron J1900 2.0-2.42G CPU
- 6*COM, 2*LAN, 5*USB2.0, 1*USB3.0
- AT & ATX Model
- Front Panel IP65 Level
- DC 9~36V power input optional




UTC-W2162A is an intelligent, fanless panel PC, 21.5" Panel PC equipped with an Intel® Celeron J1900 processor. Meeting the demands of harsh environments, in addition, the dual GbE LAN, 6 x serial ports, 6 x USB ports, make device connection and integration easy.


Specifications

Processor	CPU	Intel Baytrail-D Celeron J1900, 2.0~2.42GHz, 4cores, 4threads, 2M cache, 22nm,TDP 10W	
	Cooling System	Fanless	
	Memory	Single Socket, 4GB-8GB DDR3L	
	Storage	mSATA SSD Full Size+SATS 2.5"SSD	
	I/O ports	USB:	5xUSB2.0+1xUSB3.0, Type-A
		COM:	6xRS232, DB9, 2*RS485/RS422 optional
		Dual Display:	1xHDMI (1920*1200 @30Hz) 1*VGA (1920*1200 @30Hz)
Audio:		1×Mic-in, 1x Line-out	
Expansion:	MINI-PCIE		
Network(LAN)	2x 10/100/1000Mbps Ethernet		
Input Voltage	Input Voltage	12V DC (3 Pin Phoenix Connector) , optional 9V-36V DC	
	Control SW/LED	Power Button, AT & ATX Model	
LCD Display	Display Type:	21.5 inch TFT LED Panel(LED Backlight)	
	Max. Resolution:	1920x1080/ 16:9	
	Luminance(cd/m ²)	300nits	

Touchscreen	Touch Type	Capacitive Touch
OS Support	OS Support	Microsoft Windows 7/ Windows 10/Windows 11/ Linux
Environment	Operating Temperature	0°C ~ 50°C(14~ 140 °F)(extend temperature optional)
	Storage Temperature	-10°C ~ 60°C(-4 ~ 158 °F)
	Front Panel Protection	IP65 compliant
Mechanical	Dimensions	(W*D*H): 530x326.6x75mm; Mounting Cut out (W*D): 513x303mm
	Weight	7.8 KG N.W.
	Color	Black
	Material	Aluminum
	Certification	CE / RoHS
Custom Service	Custom Service	Custom BIOS, System Encryption, Custom LOGO

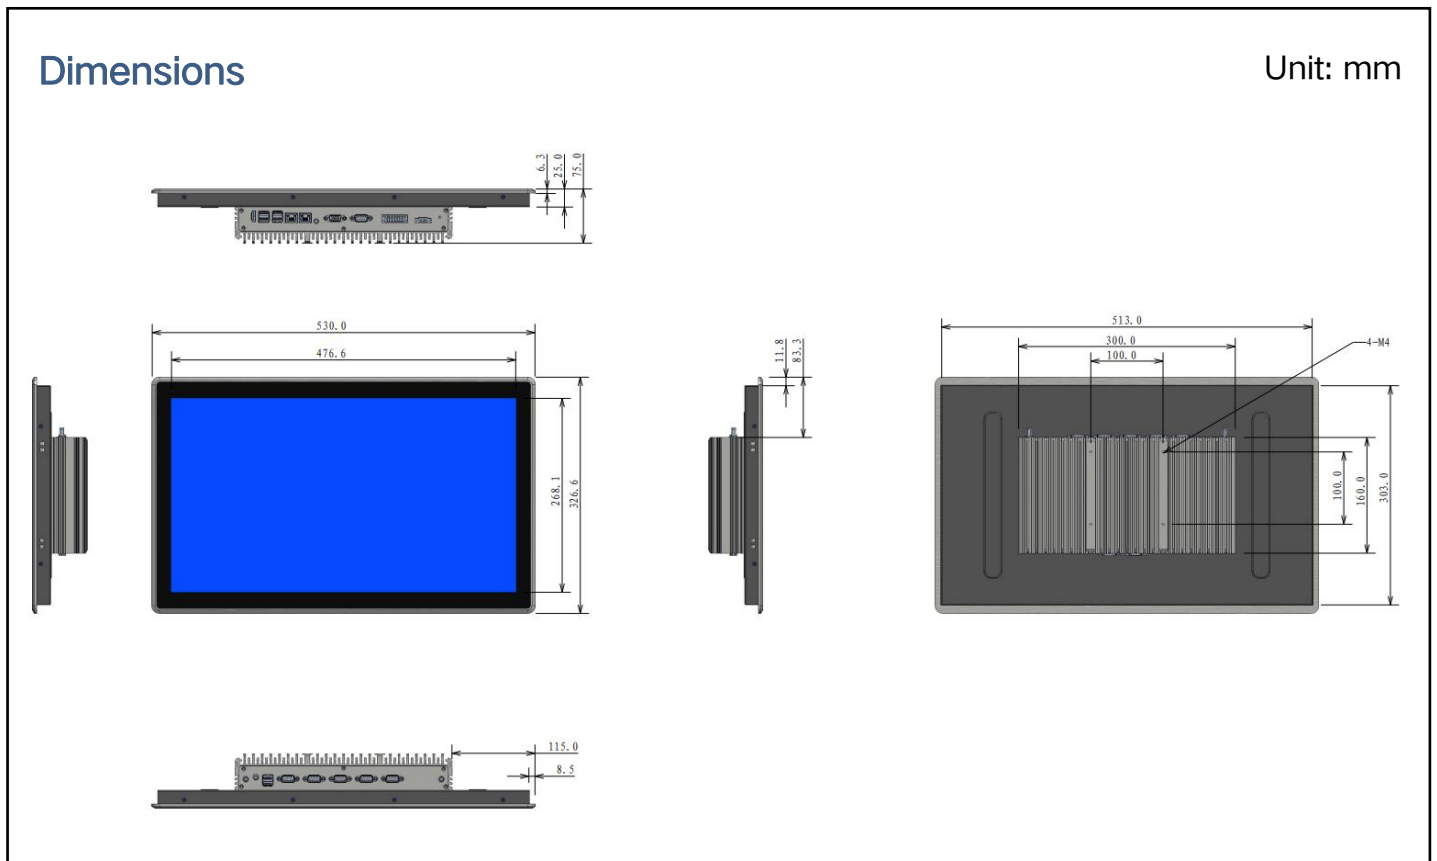



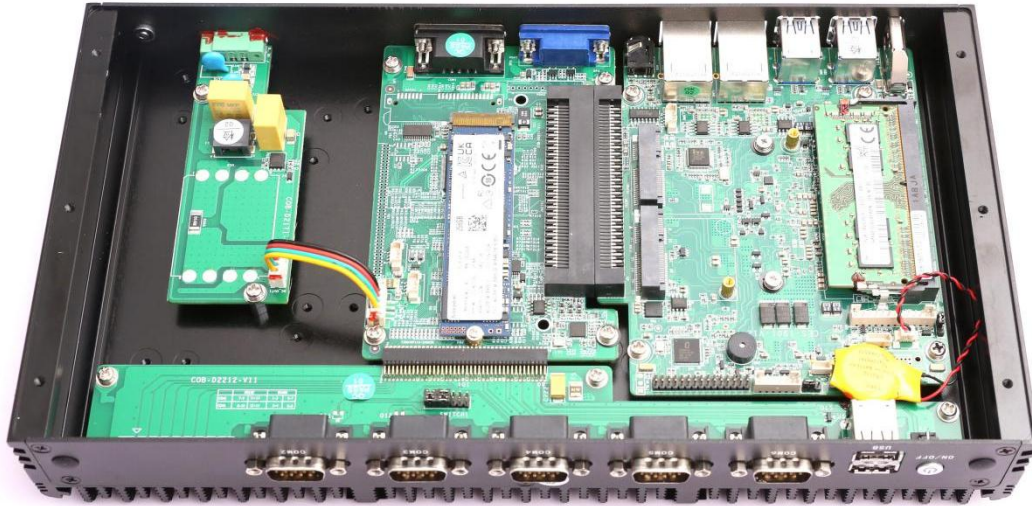

- Cable-less design and Board to Board design
- Highly compatible
- Modular design
- Easy operation: easy assembly and easy Maintenance
- Supports customization

Packing List	Ordering Information
1x UTC-2162A	UTC-2162A: Projected Capacitive Touch Version
1x Power Adapter	Operating Systems
Optional accessories	WIN7 32bit 64bit EN/CN
VESA Bracket	WIN10 32bit 64bit EN/CN
Power Cable 3-pin 200cm	WIN11 32bit 64bit EN/CN
	Linux Ubuntu 12.04/16.04/18.04